


Rohrprofile Profiles




F Feinprofil – enge Biegeradien
F fine profile – tight bending radius




C Grobprofil – hohe Ausreißkräfte
C coarse profile – high pull-out strength




H Hohe Welle – geringe Biegesteifigkeit
H highwave – low bending stiffness



M Mittleres Profil – verschleißbar
M intermediate profile – divisible




S Softwave – hoher Vibrationsschutz
S softwave – very good vibration protection

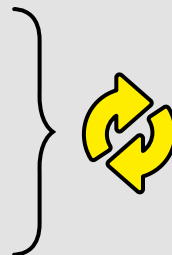

kompatibel mit FIPLOCK® ONE
compatible with FIPLOCK® ONE

X = Sonderprofile / *Special profiles*

Biegeradius / *Bending radius*

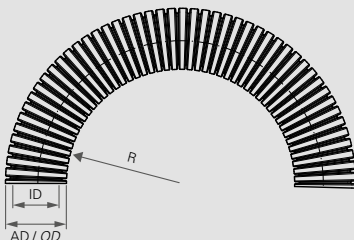

stat. R = kleinster empfohlener Biegeradius für statische (feste) Verlegung
lowest recommended bending radius for static (fixed) installation

dyn. R = kleinster empfohlener Biegeradius für dynamische (flexible) Verlegung
lowest recommended bending radius for dynamic (flexible) installation